


Thermal Printer Mechanism Series
With Classic Horizontal Structure

Printer Mechanism

Auto-cutter 3 Inch PT725EP

World's Best Product

- ▶ Cutting type: partial cut
- ▶ Printing speed: 150mm/s
- ▶ Support 79.5 & 82.50 mm paper
- ▶ Easy paper loading
- ▶ Auto-cutter
- ▶ straight path paper feeding

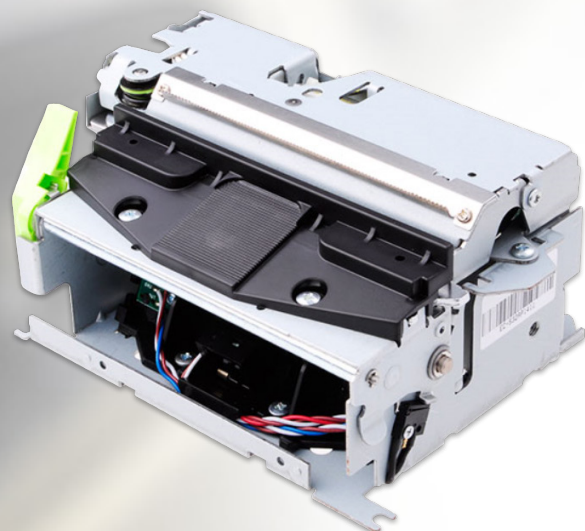

3 Inch with auto-cutter PT725EP

Features

1. Low voltage supply

The voltage used to drive the thermal printer head is equal to the logic voltage, or is driven by a 5 V single power line, the range of operating voltage is 24~26.5V.

2. Compact and lightweight design

The mechanism is compact and light, dimensions: 126.76mm (width) * 91.9mm (depth) * 56.4mm (height)

3. Printing with high resolution

A high-density printer head of 8 dots/mm makes the good printing quality

4. High speed printing

According to driving power and sensitivity of thermal paper, set different printing speed required.




Printing speed is 150 mm/ s(max.)

5. Easy paper loading

Detachable rubber roller structure makes the paper loading easier

6. Low noise

Thermal line dot printing is used to guarantee low noise printing.

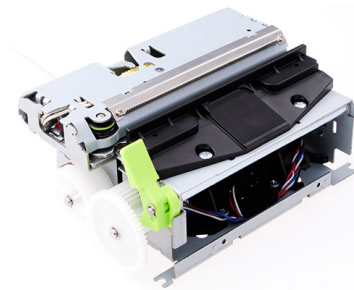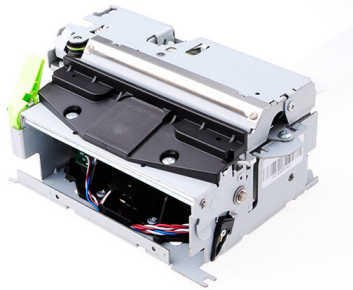

Specifications

Series Model	PT725EP	
Print Method	Direct line thermal	
Resolution	8 dots/mm	
Max. Printing Width	80mm	
Number of Dots	640	
Paper width	82.5±0.5mm	
Max. Printing Speed	150mm/s	
Paper Path	Curved or Straight	
Drive Voltage	24V ± 10%	
PEAK CURRENT	Head(Max.)	6.7A(26.4V/160dots)
	Motor	480mA
	Cutting Type	Partial cut
RELIABILITY	Pulse Activation	100 million
	Abrasion Resistance	200KM
	Paper Cutting	1,500,000 cuts
Operating Temperature	0 - 50°C	
Dimensions(W*D*H)	126.75*91.9*56.4mm	
Weight	503g	
Compatible with	Epson M-T532	

Applications

- ATM machines
- POS printers
- Vending Machines
- Gaming and Lottery
- Parking Meters
- Ticketing
- Voting
- Kiosks